


GRABO[®] H V2

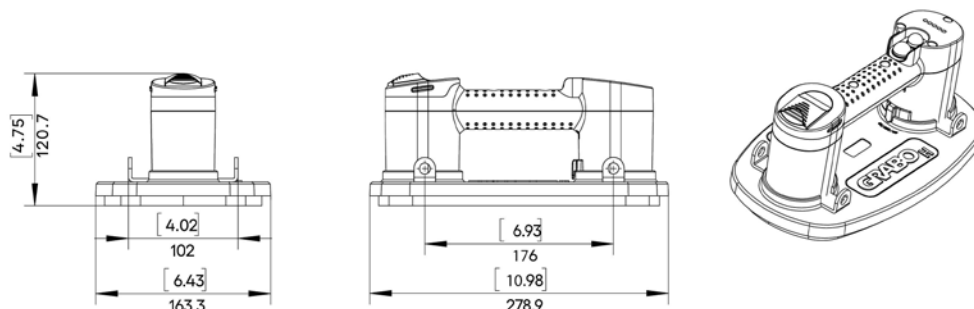

SPECIFICATIONS:

Battery	7.4V, AA Nanfu Alkaline batteries (x6) / 18650 Li-ion (x2)
Rated Power	10 W
Rated Air Flow	8 L/min (0.28 cfm)
Maximum Vacuum Rate	8.7 Psi (0.6 bar, 60 kPa)
Maximum Lifting Force	165 lbs (75 kg)
Dimensions	10.94 x 6.38 x 4.72 in (278 x 162 x 120 mm)
Weight (with battery)	2 lbs (0.92 kg)
Working Temperature	32-140°F (0-60°C)

LIFTING FORCE CHART:

	Perpendicular Holding Force	Parallel Holding Force
Metal	139 lbs (63 kg)	99 lbs (45 kg)
Wood	110 lbs (50 kg)	62 lbs (28 kg)
Glass	165 lbs (75 kg)	110 lbs (50 kg)
Rough Slate	143 lbs (65 kg)	77 lbs (35 kg)
Plastic	132 lbs (60 kg)	99 lbs (45 kg)
Ceramic Tile	143 lbs (65 kg)	99 lbs (45 kg)
Rough Concrete	82 lbs (37 kg)	77 lbs (35 kg)
Drywall	82 lbs (37 kg)	33 lbs (15 kg)

NOTICE: GRABO[®] H V2 was tested up to 165 lbs (75 kg) at maximum lifting force under ideal conditions.